

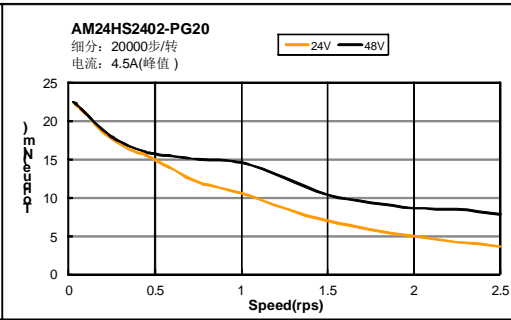
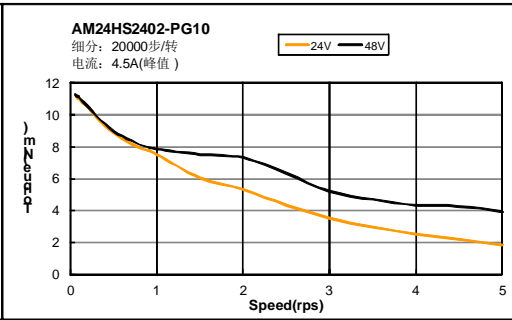
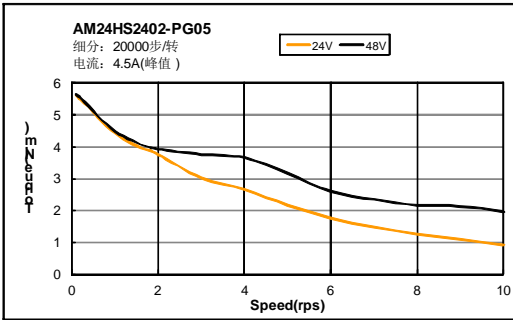
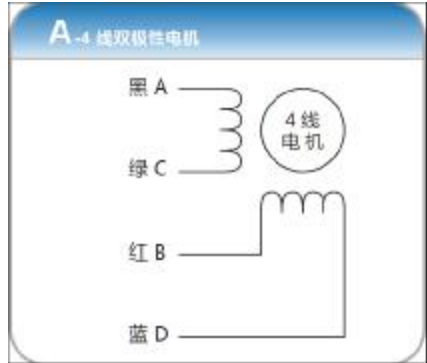
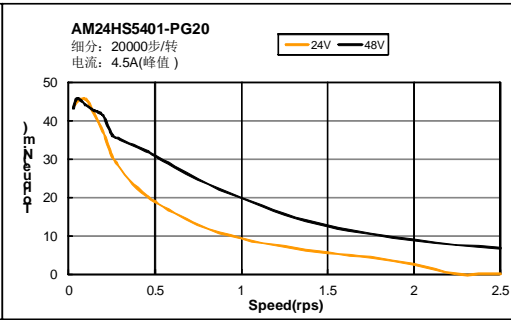


A

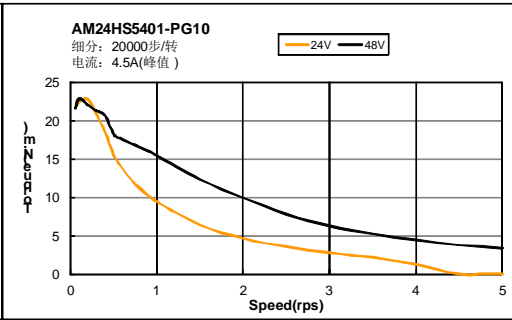

B

C

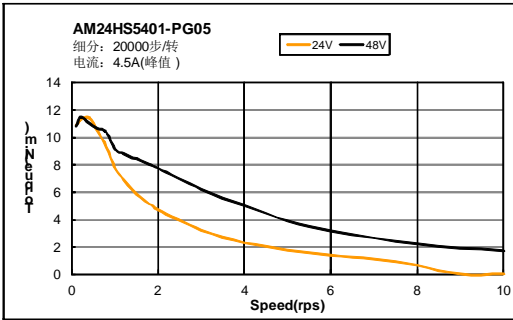

D

型号	接线	长度 (mm)	额定电流 (A)	级数	减速比	精度 (分arc-min)	最大输出扭矩 (N.m)	最大承载扭力 (N.m)	惯量 (g.cm ²)	效率	噪音 (dB)	重量 (Kg)
AM24HS2402-PG05	A	127.5	4.5	1	5	10	6	16	11250	96%	<65	1.66
AM24HS2402-PG10	A	127.5	4.5	1	10	10	12	12	45000	96%	<65	1.66
AM24HS2402-PG20	A	140.5	4.5	2	20	15	24	44	180000	94%	<60	1.87
AM24HS5401-PG05	A	158.5	4.5	1	5	10	12.5	16	22500	96%	<65	2.23
AM24HS5401-PG10	A	158.5	4.5	1	10	10	25	12	90000	96%	<65	2.23
AM24HS5401-PG20	A	171.5	4.5	2	20	15	50	44	360000	94%	<60	2.44

E

F

Unit: mm 第一角画法 FIRST ANGLE METHOD 未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1:m 未注形状与位置尺寸公差 Geometrical tolerance for features without individual tolerance indications GB/T 1184-K eqv ISO 2768-2:K	批准 Approve	Hybrid Stepping Motor SHANGHAI AMP & MOONS' AUTOMATION CO.,LTD This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.						
标准化 Standard	工艺 Technology							
审核 Check	设计 Design							
原始版本 Original revision								
REV.	版本记录 REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	SCALE 1:1	Sheet 1 of